



SLATS

FOR AUTOMATIC COVERS



**PERFORMANCE
AESTHETICS
SAFETY**

OPAQUE PVC SLATS


HOW TO CHOOSE THE SLATS FOR YOUR COVER?

	OPAQUE PVC SLATS	POLYCARBONATE SLATS CRYSTAL BLACK	POLYCARBONATE SLATS COLOURED
SAFETY	****	****	****
WATER PROTECTION	***	***	***
HEATING	-	*****	*****
INSULATION	*****	*****	*****
EVAPORATION	*****	*****	*****
TREATMENT PRODUCT SAVINGS	*****	*****	**
SERVICE LIFE	****	*****	*****

***** Highly effective **** Effective *** Moderately effective ** Very partially effective

OPAQUE PVC SLATS

Thanks to their sleek design, DEL cover slats discretely follow the lines of your pool. 4,000 hours of tests by an independent laboratory guarantee their resistance to ageing making it possible to meet the NF P 90-308 standard for pool safety.

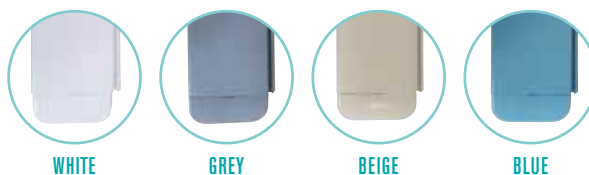

WHITE

GREY

BEIGE

BLUE

PRODUCT SHEET

- 69 mm extruded highly stain resistant PVC slats with no lead additives.
- UV treatment.
- Reduced diameter when on the roller.
- Patented system. Patent covering the possibility of fitting and/or removing the slats by sliding them in order to make the installation and the maintenance of the cover easier. Only from DEL.

MAXIMUM SAFETY


An essential addition to DEL covers, the locking kits ensure the complete closure of your pool. A wide range of colours makes it possible to match the kits to your coating colour. Ask your pool professional for advice.






SOLAR

POLYCARBONATE SLATS

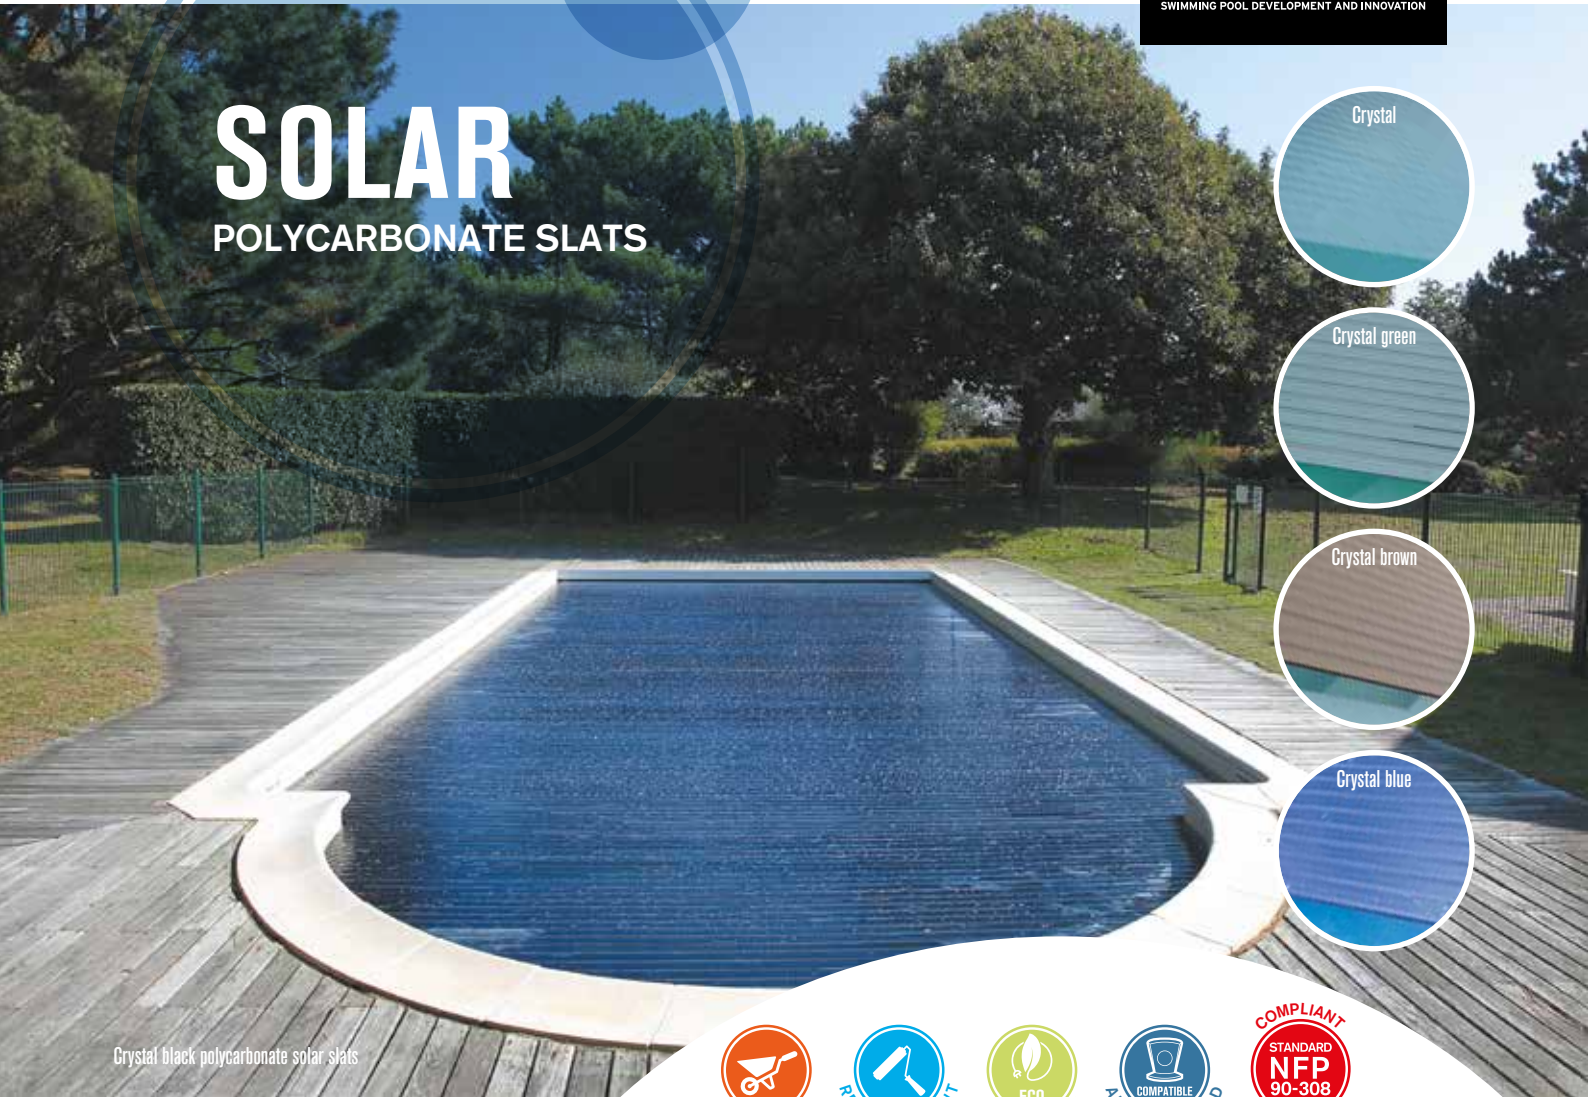


Crystal black polycarbonate solar slats

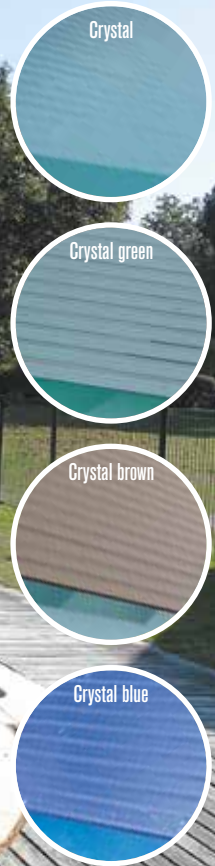

ULTRA HIGH PERFORMANCE POLYCARBONATE SOLAR SLATS COMPLIANT WITH THE FRENCH STANDARD


The polycarbonate solar slats combine the excellence of traditional PVC slats with energy performance. They act as true “solar panels”. Perfectly suited to the coolest regions, they enable you to heat the pool water and gain several degrees compared to a traditional cover.

Exclusive from DEL

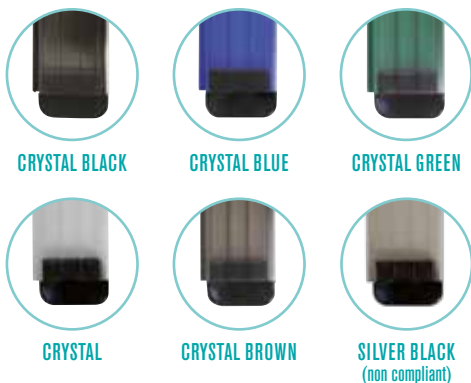

PRODUCT SHEET

True solar panels, the slats heat the pool water.

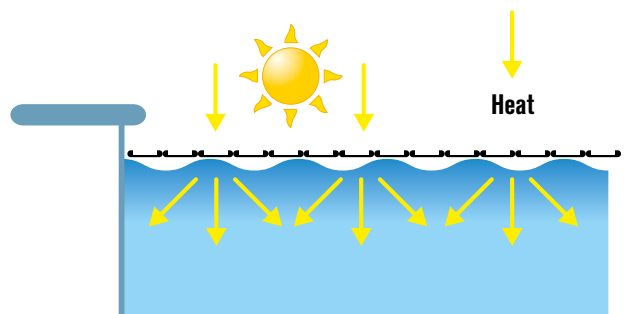

- 69 mm slats, 13 mm thick, stain and organic deposit resistant with no lead-based additives.
- UV treatment.
- Ultra efficient, it heats the pool water.
- Highly shock resistant.
- **Adapted to mobile, in-ground and above-ground covers.**
- **Highly aesthetic finish.**



THE LOCKING KITS

Locking kits enable to lock your pool cover making it impossible for it to be removed.

PUSHLOCK KIT



Available in 6 colours to perfectly match the coating colour.



WHITE



BEIGE



BLUE



DARK BLUE



MEDIUM GREY



DARK GREY



Flexible stainless steel weight: in case you forgot to unlock the Pushlock when opening the cover, the material damage is reduced.

QUICKLOCK KIT



Available in 4 colours.



WHITE



BEIGE



BLUE



GREY

STRAPLOCKING KIT



Available for both concrete coping and wooden coping.

The purpose of DEL safety covers is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children.

DEL automatic covers are safety covers designed to prevent children under 5 years old from accessing the pool. A child can drown in under 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult.

Please read carefully and keep in a safe place.

The DEL slat cover is one of the elements of a safety cover designed to prevent access to the pool to children under five years old. This product complies with the NF P 90-308 standard. It is not a substitute for common sense or personal responsibility. The purpose of this cover is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children. A child can drown in under 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult. **Guarantee:** years for the opaque PVC slats and 5 years for the solar polycarbonate slats in compliance with our general sales terms and conditions. **Manufacturing form:** For the cover to be correctly fitted to the pool it is essential to supply a drawing of the pool with measurements taken every metre. In compliance with standard NF P 90-308, the gap between the inside of the pool and the edge of the cover must be less than 70 mm. **Manoeuvre time:** 3 minutes for automatic opening or closure and 30 seconds to lock or unlock the locking kits. **Use:** in all seasons. For correct operation maintain a constant water level corresponding to normal pool filtering. It is essential to fit a water level regulator. The water level must be compliant with the instructions. **Use limitations:** The installation of a DEL cover on overflow pools and/or pools with steps on the length side (removable steps on the side) is not compliant with standard NFP 90-308. In this case please use other compliant equipment. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with DEL covers. **Wintering:** Close the pool for winter depending on the geographic location. Without lowering the water level, close the cover in the safety position and eventually install a wintering net to protect the cover. If the water level is dropped to put the parts to insert above the water line, roll the cover and secure the pool using a safety wintering cover. **Packing list:** For 5 x 10 m pools. **Slats:** 5 packs of 5.10 x 0.25 x 0.20 m. Weight: 125 kg.

Manufacturer: DEL La Basse Croix Rouge 35530 BRECE - France. export@fija-group.com - www.del-piscine.fr

For more information
about these products
ask your pool professional for advice.

Distributor's stamp